

# Sanipro XR



The neat unit makes it easy to install an extra bathroom. Can easily deal with a WC, basin, bidet and a power shower.



5 m  
100 m



## PRODUCT BENEFITS

- Reliable and efficient macerating system.
- Drains all the water from a bathroom room.
- Quiet product.

## CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40, 100 mm



Single blade cutter




## PACKAGING

Sanipro XR, non-return valve, connectors and activated carbon filter included to neutralise odours.

## CURVE

Discharge height (m)

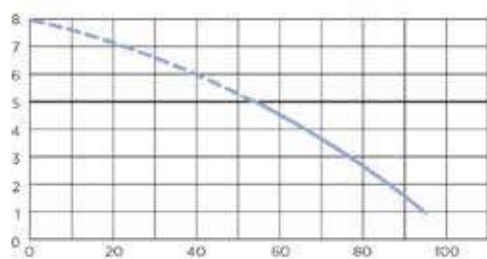

Flow rate (l/min)

## TECHNICAL FEATURES


|                              |                      |
|------------------------------|----------------------|
| Number of entries            | 4                    |
| External inlet diameter      | 40, 100 mm           |
| Discharge diameter ext.      | 22/28/32 mm          |
| Min. shower tray height      | 13 cm                |
| Max. incoming temperature    | 35 °C                |
| Voltage - Frequency          | 220-240 V - 50-60 Hz |
| Motor power                  | 400 W                |
| IP Rating                    | IP44                 |
| Electrical class             | I                    |
| Identification and logistics |                      |
| Gross weight                 | 7 kg                 |
| Factory code                 | SRSTD                |

## OPTIONAL

**Sanialarm**  
Factory code : ALARM  
See pg. 19



## DIMENSIONS

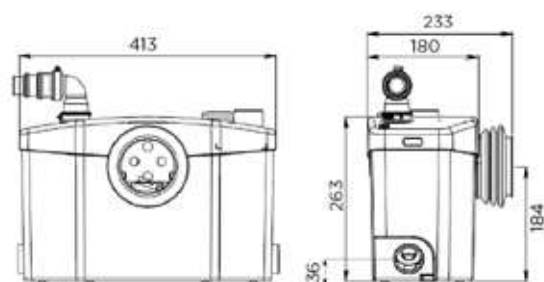

Dimensions (mm)